







### Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class | design
- · Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
   3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty


# Applications

- · LED street lighting
- LED high-bay lighting
- Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

# Description

HLG-120H series is a 120W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-120H operates from  $90 \sim 305 \text{VAC}$  and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for  $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$  case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-120H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

# Model Encoding

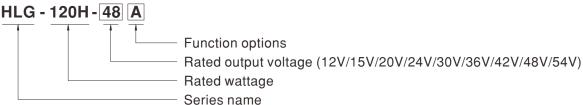

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request


# 120W Constant Voltage + Constant Current LED Driver

#### **SPECIFICATION**

MODEL		HLG-120H-12	HLG-120H-15	HLG-120H-20	HLG-120H-24	HLG-120H-30	HLG-120H-36	HLG-120H-42	HLG-120H-48	HLG-120H-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4		7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V
ОИТРИТ	RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A
			120W	120W	120W	120W	122.4W	121.8W		124.2W
	RATED POWER	120W	150mVp-p		150mVp-p			200mVp-p	120W	
	RIPPLE & NOISE (max.) Note.2			150mVp-p		200mVp-p	200mVp-p	Zuumvp-p	200mVp-p	200mVp-p
	VOLTAGE ADJ. RANGE		r A-Type only	`	· · · · ·	07 001/	22 401/	20 401/	40 501/	10 501/
		10.8 ~ 13.5V	L	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V
	CURRENT ADJ. RANGE		r A-Type only	i .		0 44	17 2 10	1.4 2.04	4.0 0.54	4.4.000
	VOLTAGE TOLEDANGE N. C.	5 ~ 10A	4 ~ 8A	3 ~ 6A	2.5 ~ 5A	2 ~ 4A	1.7 ~ 3.4A	1.4 ~ 2.9A	1.2 ~ 2.5A	1.1 ~ 2.3A
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±2.0%	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
		1200ms,50m		00ms,50ms/2	30VAC					
	HOLD UP TIME (Typ.)	12ms / 115VA	C, 230VAC							
	VOLTAGE RANGE Note.5	90 ~ 305VAC								
	VOLIAGE NAME NOTE.S	(Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE	47 ~ 63Hz								
	DOMED FACTOR (Turn)	PF≥0.98/115VAC, PF≥0.95/230VAC, PF≥0.93/277VAC @ full load								
	POWER FACTOR (Typ.)	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
	TOTAL HARMONIO DIGTORTION	THD< 20% (@ load≥50% / 115VAC,230VAC; @ load≥75% / 277VAC)								
	TOTAL HARMONIC DISTORTION	(Please refe	r to "TOTAL HA	ARMONIC DIS	STORTION (TI	HD)" section)	,			
INPUT	EFFICIENCY (Typ.)	92%	92%	93%	93%	93%	93%	93%	93.5%	93.5%
	AC CURRENT (Typ.)	1.4A / 115VA			.55A / 277VAC					70.070
	INRUSH CURRENT (Typ.)						FMA 410			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	COLD START 60A(twidth=375µs measured at 50% Ipeak) at 230VAC; Per NEMA 410  5 units (circuit breaker of type B) / 9 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT	<0.75mA/27	7\/Δ ∩							
	LEARAGE GORRERT	<0.75mA / 277VAC								
	OVER CURRENT	95 ~ 108%								
		Constant current limiting, recovers automatically after fault condition is removed  Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT							47 5014	E4 001/	50 051/
PROTECTION	OVER VOLTAGE	14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V
		Shut down o/p voltage with auto-recovery or re-power on to recovery								
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down								
	WORKING TEMP.		,	e refer to "OU	TPUT LOAD v	s TEMPERATI	JRE" section)			
	MAX. CASE TEMP.	Tcase= +80°C	) 							
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH	non-condensir	ng						
LIVINORMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,								
	TEMP. COEFFICIENT	±0.03%/°C (0	~60°C)							
	VIBRATION	10 ~ 500Hz, 5	G 12min./1cyc	le, period for	72min. each a	ong X, Y, Z axe	S			
	CAFETY CTANDADO	UL8750(type"HL"), CSA C22.2 No. 250.0-08. ENEC. TUV EN61347-1. EN61347-2-13 independent: IP65 or IP67. J61347-1.								
	SAFETY STANDARDS Note.8	J61347-2-13 approved ; design refer to UL60950-1, TUV EN60950-1								
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC								
EMC	ISOLATION RESISTANCE		G, O/P-FG:10							
-		-				EN61000-3-2 (	Class C (@ Ina	d≥50%) · FN6	1000-3-3	
}	EMC IMMUNITY			•	-		, -	,	ne-Earth 4KV, I	ine-l ine 2K
	MTBF	·							= unun TIV, I	בוווס בו
OTHEDS		220*68*38.8n		\-33∠ (¤eiic0re	e), 101.1KIII'S	min. MIL-HE	/DN-21/F (25 (			
OTHERS	DIMENSION		s/14.4Kg/0.8Cl	IFT						
	PACKING  1. All parameters NOT special		•		out rated our	ant and 25°C	of ambient tom	neraturo		
NOTE									nacitor	
	Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.     Tolerance: includes set up tolerance, line regulation and load regulation.									
	1 olerance : includes set up tolerance, line regulation and load regulation.     4. Please refer to "DRIVING METHODS OF LED MODULE".									
	S. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.									
	6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.									
	7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the									
	complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.									
	8. The model certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model . Please contact MEAN WELL for details.									
	9. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently									
	connected to the mains.									
	connected to the mains.  10. This series meets the typic  11. Please refer to the warran		-			•	rly (tc) point (o	r TMP, per DL	C), is about 75	°C or less.


# ■ BLOCK DIAGRAM

Fosc: 100KHz

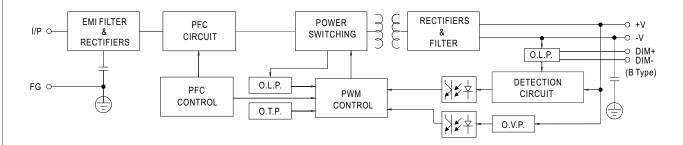

# ■ DRIVING METHODS OF LED MODULE

\*\* This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

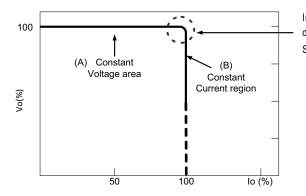

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




# ■ DIMMING OPERATION




#### **%** 3 in 1 dimming function (for B-Type)

- · Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
  - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC

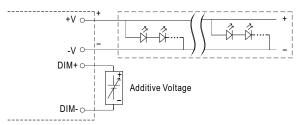


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

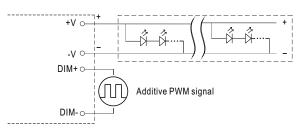



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

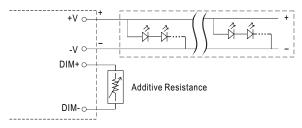

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

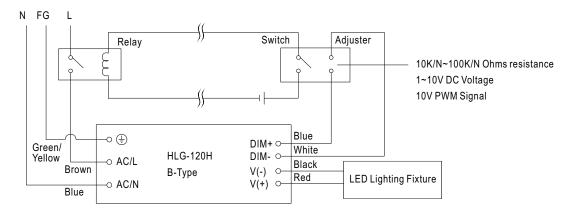


Using a switch and relay can turn ON/OFF the lighting fixture.



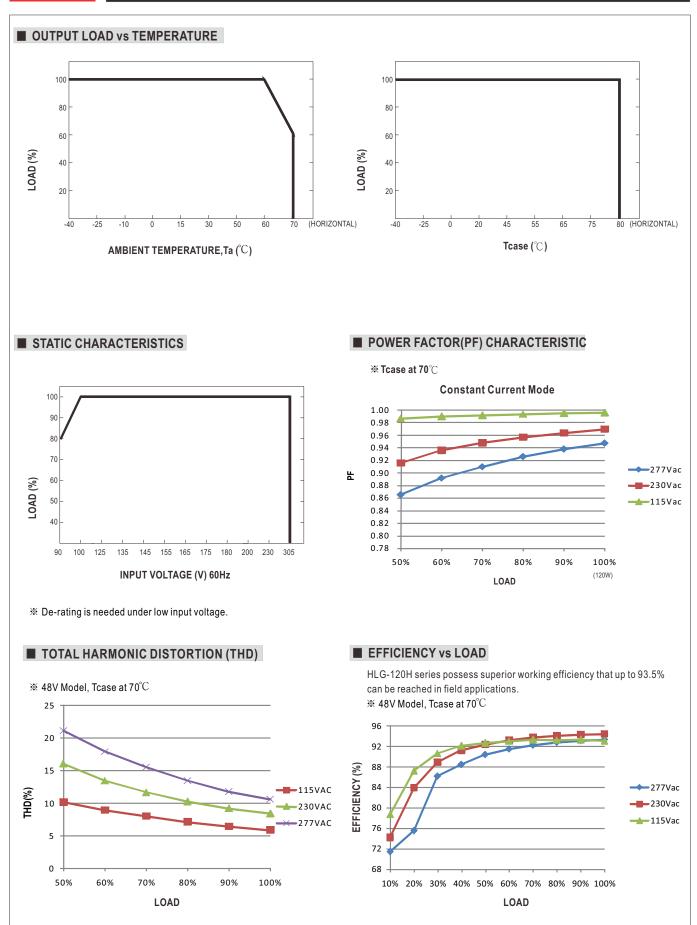




# ■ LIFETIME

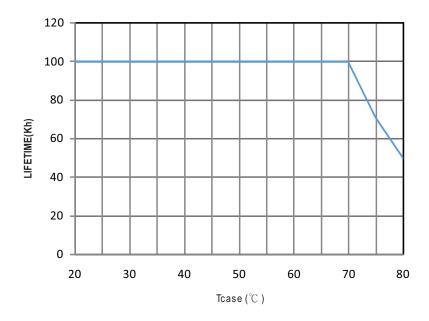



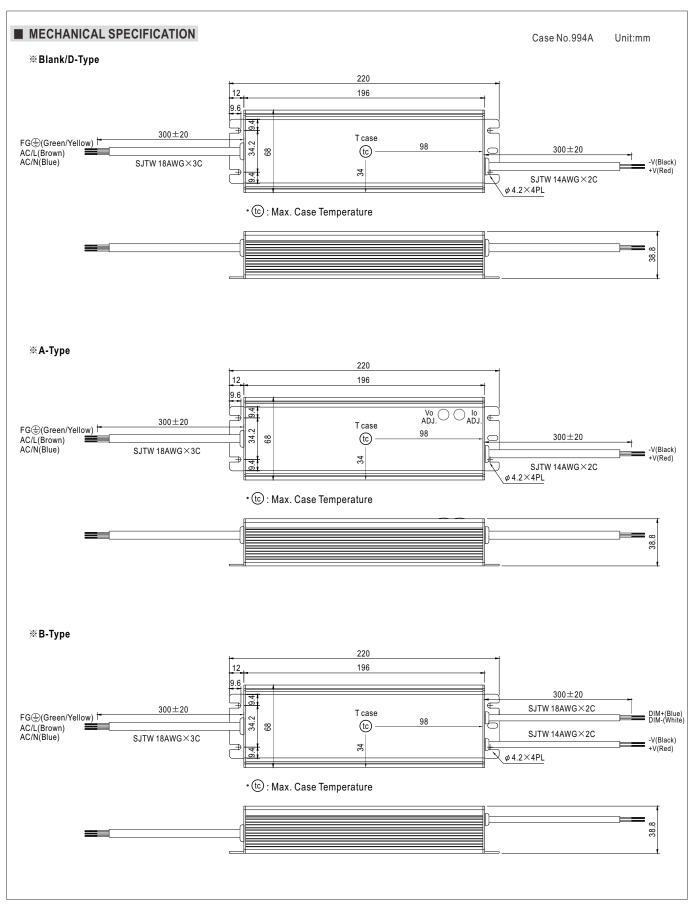




# ■ WATERPROOF CONNECTION


#### ${}^{\mbox{\tiny{$\%$}}}$ Waterproof connector

 $Waterproof connector \ can be \ assembled \ on \ the \ output \ cable \ of \ HLG-120H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$ 




Size	Pin Configuration (Female)			
M12	000	000		
IVIIZ	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)			
M15	$\odot$			
MID	2-PIN			
	12A/PIN			
Order No.	M15-02			
Suitable Current	12A max.			




#### **X** Cable Joiner

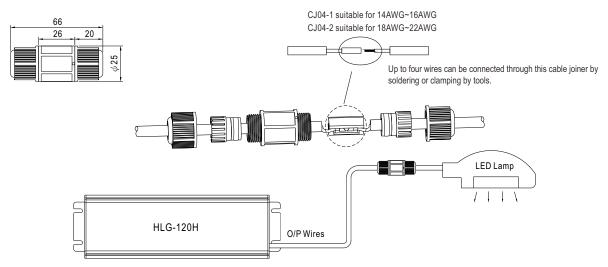

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

O Junction box option is available for A/Blank - Type. Please contact MEAW WELL for details.

#### **\* Junction Box Option**

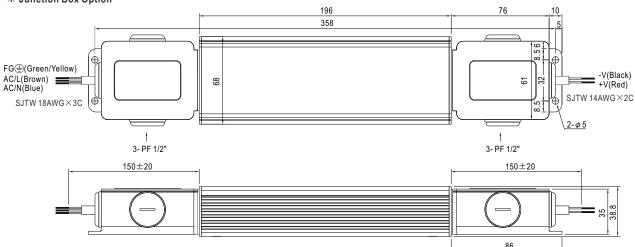

# ■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html